

UMAC Series 350 Yellow Label Excess Flow Valves

5 psig to 150 psig (345 mbar to 10 bar) – Inlet Pressure


Inlet Pressure		SERIES 350 Nom. Min. Trip Point 0.6 SG Gas		Bypass Flow After Trip (Nom. Max) 0.6 SG Gas	
		SCFH	SCMH	SCFH	SCMH
psig	bar				
5	0.34	350	9.91	18	0.51
10	0.69	400	11.33	20	0.57
15	1.03	430	12.18	23	0.65
20	1.38	460	13.03	25	0.71
30	2.07	530	15.01	28	0.79
40	2.76	600	16.99	32	0.91
50	3.45	650	18.41	35	0.99
60	4.14	700	19.82	37	1.05
70	4.83	730	20.67	39	1.10
80	5.52	780	22.09	41	1.16
90	6.21	820	23.22	46	1.30
100	6.90	860	24.35	50	1.42
150	10.34	1,000	28.32	75	2.12

For pressures over 150 psig (10.34 bar) contact GasBreaker, Inc.

Note:

Calculate service line capacities from given flow and pressure drop data to ensure adequate flow capacity is available to operate valve. For additional assistance with sizing and technical information on UMAC Excess Flow Valves, please contact GasBreaker, Inc.

TRIP RANGE CHART

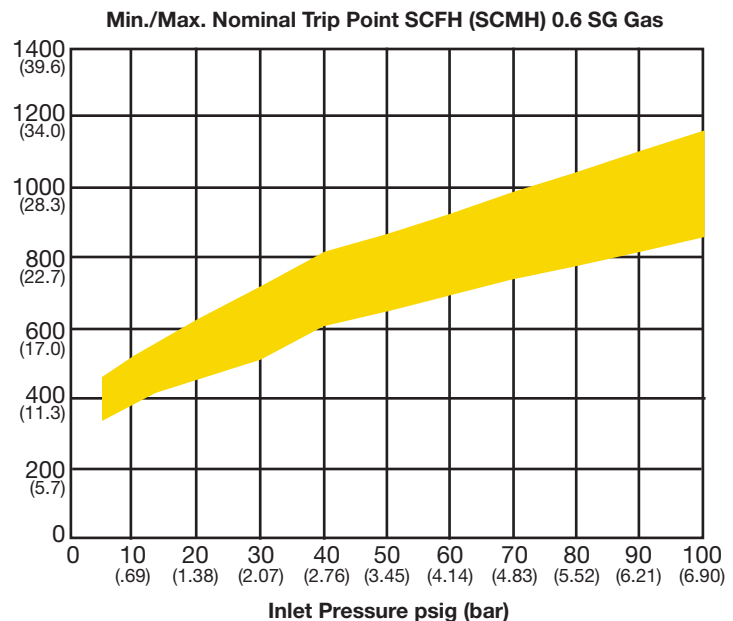

AVAILABILITY

UMAC Series 350 EFVs available in 1/2 CTS, 1/2 IPS & 3/4 CTS sticks and other prefabricated models. (see page 4 for examples)

All valves comply with: DOT Part 192.381, ASTM F 2138 and MSS SP-115: Excess Flow Valves
Tested to, or in accordance with, ASTM F 1802: Standard Test Method for Performance Testing of Excess Flow Valves

AVERAGE PRESSURE DROP AT AN INLET PRESSURE OF 10 PSIG (0.69 BAR)

UMAC EFV	Typical Customer Gas Load (0.6 SG Gas)		Average Pressure Drop Across Valve	
	SCFH	SCMH	psi	mbar
Series 350	275	7.79	0.75	51.72



GasBreaker, Inc.
 17 Lee Blvd., Ste. D
 Malvern, PA 19355-1234
1-800-524-0566
 Fax: 610-407-7211
 www.GasBreakerInc.com
 info@GasBreakerInc.com